

# MB15B13

## DUAL SERIAL INPUT PLL FREQUENCY SYNTHESIZER

### DUAL SERIAL INPUT PLL FREQUENCY SYNTHESIZER WITH 1.1GHz PRESCALER

The Fujitsu MB15B13 is a 1.1 GHz dual serial input PLL (Phase Locked Loop) frequency synthesizer designed for cellular phones, cordless phones and other radio applications. The MB15B13 has two PLL circuits on a single chip: PLL1 and PLL2. An analog switch is provided for each PLL circuit to decrease lock up time. Separate power supply pins are provided for each PLL circuit as well.

Two 1.1 GHz dual modulus prescalers are included inside and enables a pulse swallow function. It operates with a supply voltage of 3.0V typ. and dissipates 13 mA typ. of current realized through the use of Fujitsu's unique Bi-CMOS technology.

PRELIMINARY


### FEATURES

- High operating frequency:  $f_{in} = 1.1 \text{ GHz}$  ( $P_{in} = -10 \text{ dBm}$ ,  $V_{cc} = 3V$ )
- Pulse swallow function: 64/65 or 128/129
- Serial input 14-bit programmable reference divider:  $R = 8$  to 16383
- Serial input 18-bit programmable divider consisting of:
  - Binary 7-bit swallow counter: 0 to 127
  - Binary 11-bit programmable counter: 16 to 2047
 Tx and Rx programmable counters can be controlled independently.
- Low power supply voltage:  $V_{CC} = 2.7$  to 3.5V
- Low power supply current:  $I_{CC} \text{ (total)} = 13 \text{ mA typ.}$  ( $V_{cc} = 3V$ )
- Power saving function :  $I_{CC1} = I_{CC2} = 100 \mu A \text{ typ.}$  ( $V_{cc} = 3V$ )
- On-chip analog switch to achieve fast lock up time for PLL1
- On-chip programmable switch controlled by PLL2 programming sequence
- Digital lock detector
- Wide operating temperature:  $T_A = -30$  to  $80^\circ C$
- Plastic 20-pin SSOP package

### ABSOLUTE MAXIMUM RATINGS (see NOTE)


Rating	Symbol	Remark	Value	Unit
Power Supply Voltage	$V_{CC}$		-0.5 to 5.0	V
Output Voltage	$V_{OUT}$		-0.5 to $V_{CC} + 0.5$	V
Open Drain Voltage	$V_{OOP}$	fr, fp	-0.5 to + 5.0	V
Output Current	$I_{OUT}$		$\pm 10$	mA
Storage Temperature	$T_{STG}$		-55 to +125	$^\circ C$

**NOTE:** Permanent device damage may occur if the above **Absolute Maximum Ratings** are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

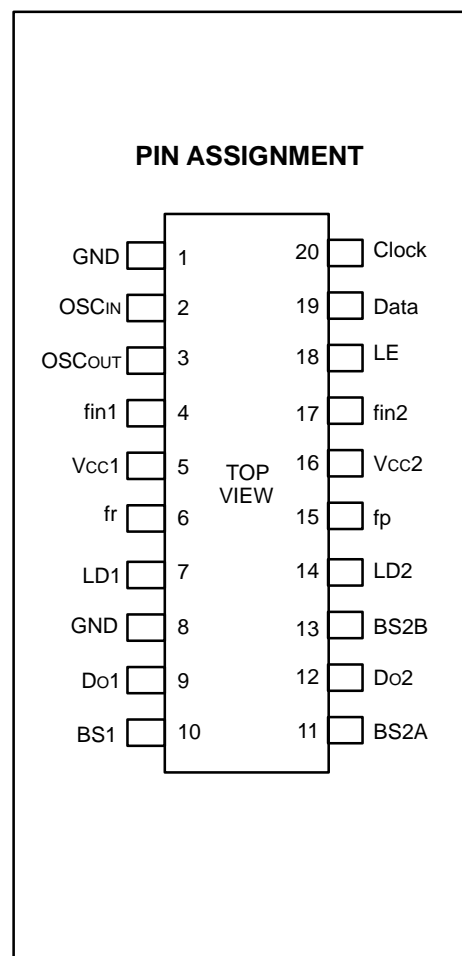

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit.

## BLOCK DIAGRAM

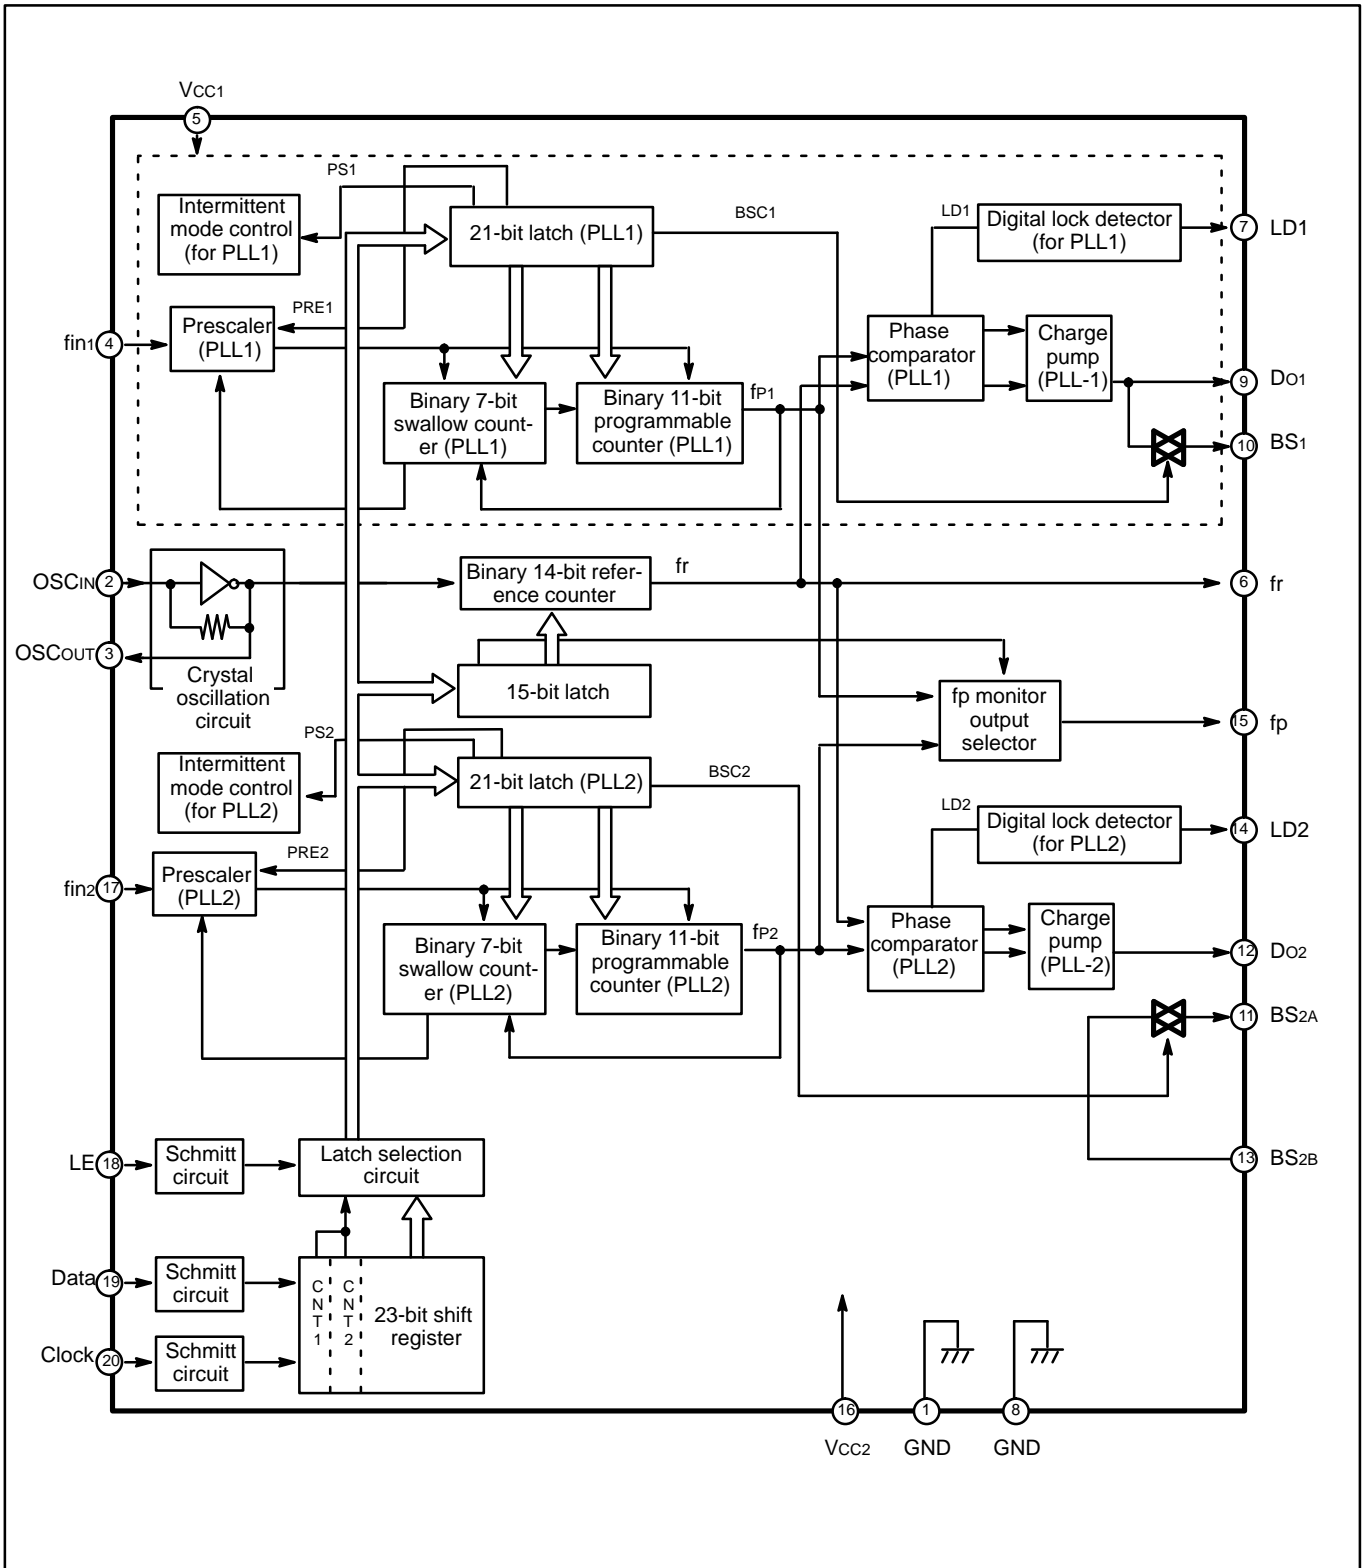

## PIN DESCRIPTIONS

Pin No.	Pin Name	I/O	Descriptions						
1	GND	–	Ground.						
2 3	OSC <sub>IN</sub> OSC <sub>OUT</sub>	I O	Oscillator input pin. Oscillator output pin. A crystal is connected between OSC <sub>IN</sub> pin and OSC <sub>OUT</sub> pin.						
4	fin1	I	Prescaler input pin of PLL1 section. The connection with VCO should be AC.						
5	Vcc1	–	Power supply voltage input pin of PLL1 section. When power is OFF, latched data of PLL1 section is cancelled.						
6	fr	O	Monitor pin for programmable reference divider output. (Open drain output)						
7	LD1	O	Lock detect signal output pin of PLL1 section. <table border="1"><tr><td>Condition</td><td>LD pin output level</td></tr><tr><td>Lock</td><td>H</td></tr><tr><td>Unlock</td><td>L</td></tr></table>	Condition	LD pin output level	Lock	H	Unlock	L
Condition	LD pin output level								
Lock	H								
Unlock	L								
8	GND	–	Ground						
9	Do1	O	Charge pump output pin of PLL1 section.						
10	BS1	O	Analog switch output pin of PLL1 section, and controlled by BSC bit.						
11	BS2A	I/O	Analog switch I/O pin of PLL2 section						
12	Do2	O	Charge pump output pin of PLL2 section.						
13	BS2B	I/O	Analog switch I/O pin of PLL2 section						
14	LD2	O	Lock detection signal output pin of PLL2 section. <table border="1"><tr><td>Condition</td><td>LD pin output level</td></tr><tr><td>Lock</td><td>H</td></tr><tr><td>Unlock</td><td>L</td></tr></table>	Condition	LD pin output level	Lock	H	Unlock	L
Condition	LD pin output level								
Lock	H								
Unlock	L								
15	fp	O	Monitor pin for programmable divider output. (Open drain output) This pin outputs divided frequency of PLL1 section or PLL2 section depending upon FP bit setting. <table border="1"><tr><td>FP bit</td><td>Output</td></tr><tr><td>H</td><td>PLL1 section (fp1)</td></tr><tr><td>L</td><td>PLL2 section (fp2)</td></tr></table>	FP bit	Output	H	PLL1 section (fp1)	L	PLL2 section (fp2)
FP bit	Output								
H	PLL1 section (fp1)								
L	PLL2 section (fp2)								

## PIN DESCRIPTIONS (Continued)

Pin No.	Pin Name	I/O	Descriptions
16	Vcc2	–	Power supply voltage input pin for PLL2 section, programmable reference divider, shift register, and crystal oscillator. When power is OFF, latched data of PLL2 section and reference counter is cancelled.
17	fin2	I	Prescaler input pin of PLL2 section. The connection with VCO should be AC.
18	LE	I	Load enable input pin. This pin is followed by a schmitt trigger circuit. When this pin is high, the data stored in the shift register is transferred into the latch depending on a control data.
19	Data	I	Serial data input pin of 23-bit shift register. This pin is followed by a schmitt trigger circuit. The stored data in the shift register is transferred to one of PLL1 section, PLL2 section and programmable counter depending upon control data settings.
20	Clock	I	Clock input pin of 23-bit shift register. This pin is followed by a schmitt trigger circuit. On rising edge of the clock, one bit of data is transferred into the shift register.

## FUNCTIONAL DESCRIPTIONS

The divide ratio can be calculated using the following equation:

$$f_{vco} = \{(P \times N) + A\} \times f_{osc} \div R \quad (A < N)$$

$f_{vco}$ : Output frequency of external voltage controlled oscillator (VCO)

P: Preset divide ratio of dual modulus prescaler (64 or 128)

N: Preset divide ratio of binary 11-bit programmable counter (16 to 2047)

A: Preset divide ratio of binary 7-bit swallow counter ( $0 \leq A \leq 127$ )

$f_{osc}$ : Reference oscillation frequency

R: Preset divide ratio of binary 14-bit programmable reference counter (8 to 16383)

# FUNCTIONAL DESCRIPTIONS

## SERIAL DATA INPUT

Serial data is entered using three pins, Data pin, Clock pin, and LE pin. Programmable divider of PLL1 section, programmable divider of PLL2 section and programmable reference divider are controlled individually.

Serial data of binary data is entered into Data pin.

On rising edge of clock, one bit of serial data is transferred into the shift register. When load enable signal is high, the data stored in the shift register is transferred to one of latch of them depending upon the control bit data setting.

Control bits		Destination of serial data
CNT1	CNT2	
L	L	Reference counter
L	H	Programmable counter of PLL1
H	H	Programmable counter of PLL2

## SHIFT REGISTER CONFIGURATION

### Programmable Reference Counter

Data Flow →																
LSB																MSB
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
C	C	F	R	R	R	R	R	R	R	R	R	R	R	R	R	R
N	N	P	1	2	3	4	5	6	7	8	9	10	11	12	13	14
T	T															
1	2															

R1 to R14 : Divide ratio setting bit for the programmable counter (8 to 16383)

FP : Test purpose bit (monitor output fp1/fp2 selection)

CNT1, 2 : Control bit

### Programmable Counter

Data Flow →																						
LSB																						MSB
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
C	C	P	P	B	A	A	A	A	A	A	A	N	N	N	N	N	N	N	N	N	N	N
N	N	S	R	S	1	2	3	4	5	6	7	1	2	3	4	5	6	7	8	9	10	11
T	T		E	C																		
1	2																					

N1 to N11 : Divide ratio setting bit for the programmable counter (16 to 2047)

A1 to A7 : Divide ratio setting bit for the swallow counter (0 to 127)

BSC : Analog switch control bit

PRE : Divide ratio setting bit for the prescaler (64/65, 128/129)

PS : Power saving control bit

CNT1, 2 : Control bit

### BINARY 14-BIT PROGRAMMABLE REFERENCE COUNTER DATA SETTING

Divide Ratio (R)	R 14	R 13	R 12	R 11	R 10	R 9	R 8	R 7	R 6	R 5	R 4	R 3	R 2	R 1
8	0	0	0	0	0	0	0	0	0	0	1	0	0	0
9	0	0	0	0	0	0	0	0	0	0	1	0	0	1
V	V	V	V	V	V	V	V	V	V	V	V	V	V	V
16383	1	1	1	1	1	1	1	1	1	1	1	1	1	1

**Note:** • Divide ratio less than 8 is prohibited.  
• Divide ratio (R) range = 8 to 16383

### BINARY 11-BIT PROGRAMMABLE COUNTER DATA SETTING

Divide Ratio (N)	N 11	N 10	N 9	N 8	N 7	N 6	N 5	N 4	N 3	N 2	N 1
16	0	0	0	0	0	0	1	0	0	0	0
17	0	0	0	0	0	0	1	0	0	0	1
V	V	V	V	V	V	V	V	V	V	V	V
2047	1	1	1	1	1	1	1	1	1	1	1

**Note:** • Divide ratio less than 16 is prohibited.  
• Divide ratio (N) range = 16 to 2047

### BINARY 7-BIT SWALLOW COUNTER DATA SETTING

Divide Ratio (A)	A 7	A 6	A 5	A 4	A 3	A 2	A 1
0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	1
V	V	V	V	V	V	V	V
127	1	1	1	1	1	1	1

**Note:** • Divide ratio (A) range = 0 to 127

### PRESCALER DATA SETTING

Divide Ratio	PRE
64/65	1
128/129	0

**Note:** • Divide ratio for each PLL1 and PLL2 is set by the serial data at that time of divide ratio setting for each programmable divider.

### ANALOG SWITCH CONTROL DATA SETTING

BSC	Analog SW (PLL1)	Analog SW (PLL2)
L	High impedance	High impedance
H	Charge pump output	BS2A and BS2B connected

**Note:** • Selection of PLL1 or PLL2 is done by the control bits of CNT1 and CNT2. And each analog switch can be controlled individually.

### POWER SAVING FUNCTION CONTROL (INTERMITTENT OPERATION)

	PS	
	H	L
PLL1's section	ON	OFF
PLL2's section and common section	ON	OFF

**Note:**


- Power saving mode for each PLL1 and PLL2 is selected by the serial data at that time of divide ratio setting for each programmable divider.
- Common section ; Crystal oscillator circuit, reference counter

Intermittent operation limits power consumption by shutting down or start the internal circuits case by case. If device operation resumes uncontrolled, the error signal output from the phase comparator may exceed the limit due to an undefined phase relationship between the reference frequency ( $f_R$ ) and the comparison frequency ( $f_P$ ) and frequency lock is lost. To prevent this, an intermittent operation control circuit is provided to decrease the variation in the locking frequency by forcibly correcting phase of both frequencies to limit the error signal output. This is done by the PS control circuit. If PS is set high, the circuit enter the operating mode. If PS is set low, operation stops and the device enters the stand-by mode.

The operating and stand-by modes alternate repeatedly. This intermittent operation limits the error signal by forcibly correcting the phase of the reference and comparison frequencies to limit power consumption.


### SERIAL DATA INPUT TIMING

$t_1$  (>100ns) : Data set up time       $t_2$  (>1000ns) : Data hold time       $t_3$  (>300ns) : Clock pulse width  
 $t_4$  (>100ns) : LE set up time to the rising edge of the last clock       $t_5$  (>800ns) : LE pulse width

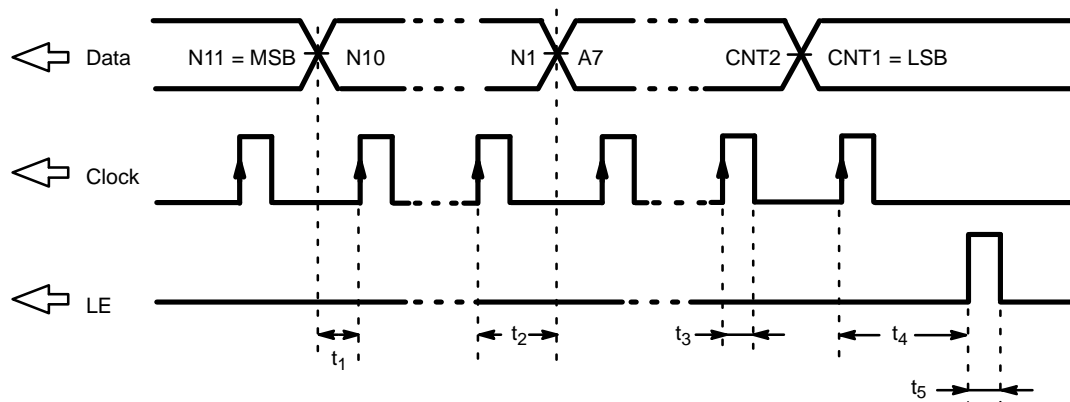

On rising edge of the clock, one bit of the data is transferred into the shift register.

# PHASE COMPARATOR OUTPUT WAVEFORM

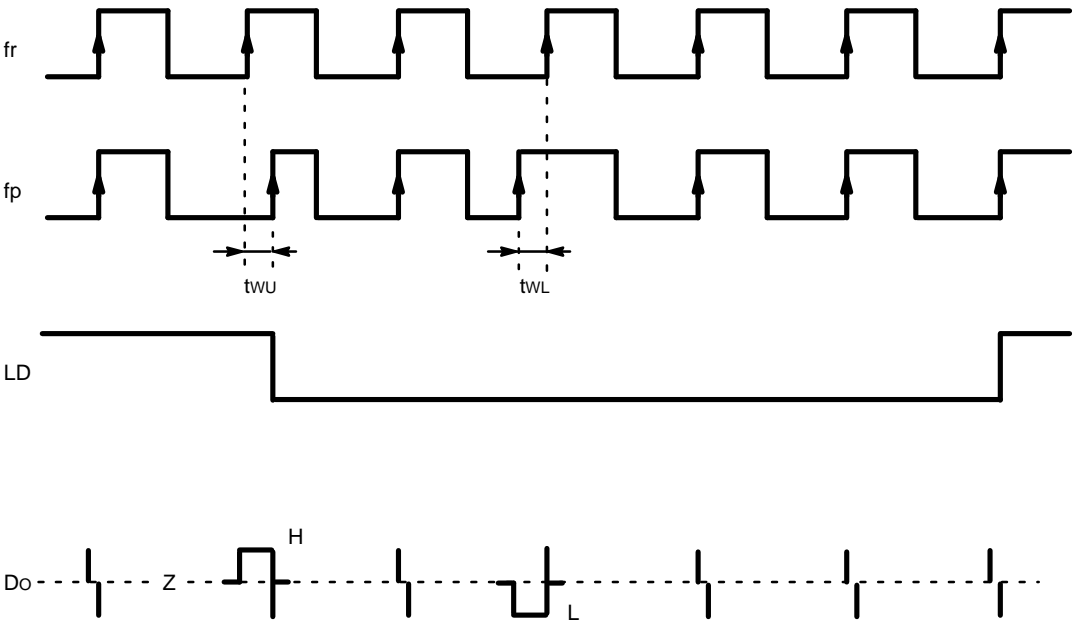

Relation between phase comparator and charge pump output

	Do output
$f_r > f_p$	H
$f_r = f_p$	Z
$f_r < f_p$	L

- Note:**
- Phase difference detection range =  $-2\pi$  to  $+2\pi$
  - LD output becomes low when phase difference is  $tw_u$  or more.
  - LD output becomes high when phase difference is  $tw_l$  or less and continues to be so for three cycles or more.
  - $tw_l$  and  $tw_u$  depend on OSCin input frequency.  
 $tw_u \geq 8/f_{osc}$  (e. g.  $tw_u \geq 625\text{ns}$ ,  $f_{osc} = 12.8\text{ MHz}$ )  
 $tw_l \leq 16/f_{osc}$  (e. g.  $tw_l \leq 1250\text{ns}$ ,  $f_{osc} = 12.8\text{ MHz}$ )



## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value			Unit	Note
		Min	Typ	Max		
Power Supply Voltage	V <sub>CC</sub>	2.7	3.0	3.5	V	V <sub>CC1</sub> = V <sub>CC2</sub>
Input Voltage	V <sub>IN</sub>	GND	–	V <sub>CC</sub>	V	
Operating Temperature	T <sub>A</sub>	–30	–	+80	°C	
Analog Switch BS2 Current	I <sub>BS</sub>	–6	–	+6	mA	V <sub>CC</sub> = 3.0V

## HANDLING PRECAUTIONS


- This device should be transported and stored in anti-static containers.
- This is a static-sensitive device; take proper anti-ESD precautions. Ensure that personnel and equipment are properly grounded. Cover workbenches with grounded conductive mats.
- Always turn the power supply off before inserting or removing the device from its socket.
- Protect leads with a conductive sheet when handling or transporting PC boards with devices.

# ELECTRICAL CHARACTERISTICS


Parameter		Symbol	Condition	Value			Unit
				Min	Typ	Max	
Power Supply Current		Icc1	PLL1 section	–	6.0 (0.1) <sup>*1</sup>	–	mA
		Icc2	PLL2 & common sections	–	7.0 (0.1) <sup>*1</sup>	–	
Operating Frequency	f <sub>in</sub>	f <sub>in</sub>		100	–	1100	MHz
	OSC <sub>IN</sub>	f <sub>osc</sub>		–	12.8	20.0	
Input Sensitivity	f <sub>in</sub>	P <sub>f<sub>in</sub></sub>	50Ω	–10	–	0	dBm
	OSC <sub>IN</sub>	V <sub>osc</sub>		0.5	–	–	V <sub>p-p</sub>
High-level Input Voltage	Data, Clock LE	V <sub>IH</sub>		V <sub>CC</sub> x0.7+0.4	–	–	V
Low-level Input Voltage		V <sub>IL</sub>		–	–	V <sub>CC</sub> x0.3–0.4	
High-level Input Current	Data, Clock LE	I <sub>IH</sub>		–	1.0	–	μA
Low-level Input Current		I <sub>IL</sub>		–	–1.0	–	
Input Current	OSC <sub>IN</sub>	I <sub>osc</sub>		–	±50	–	
High-level Output Voltage	LD	V <sub>OH</sub>	V <sub>CC</sub> = 3.0V	2.2	–	–	V
Low-level Output Voltage		V <sub>OL</sub>	V <sub>CC</sub> = 3.0V	–	–	0.4	
High-impedance Cutoff Current	Do, BS	I <sub>OFF</sub>		–	–	1.1	μA
Output Current	LD	I <sub>OH</sub>		–1.0	–	–	mA
		I <sub>OL</sub>		–	–	1.0	
	Do1, 2	I <sub>OH</sub>	V <sub>CC</sub> = 3.0V	–	–0.6 <sup>*2</sup>	–	mA
		I <sub>OL</sub>	V <sub>CC</sub> = 3.0V	–	6.0 <sup>*2</sup>	–	
Analog Switch ON Resistance		R <sub>ON</sub>		–	50	–	Ω

**Notes:** \*1 : The value in ( ) is power supply current in power saving mode.

\*2 : L type charge pump which is similar to MB15A31's is used.

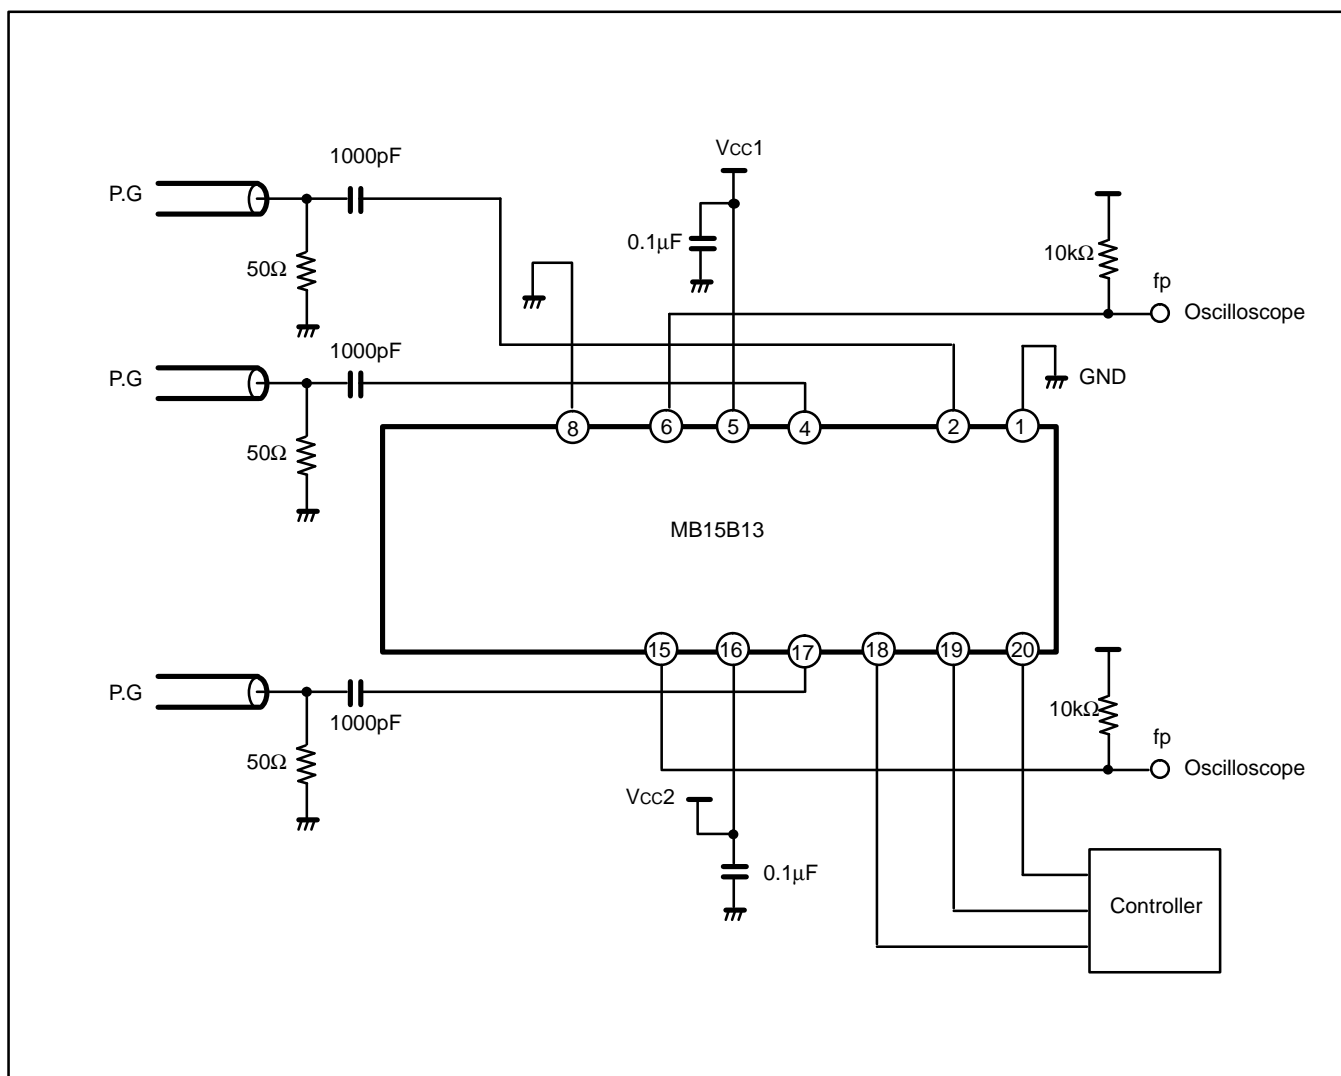**TEST CIRCUIT (PRESCALER INPUT SENSITIVITY)**

# APPLICATION EXAMPLE

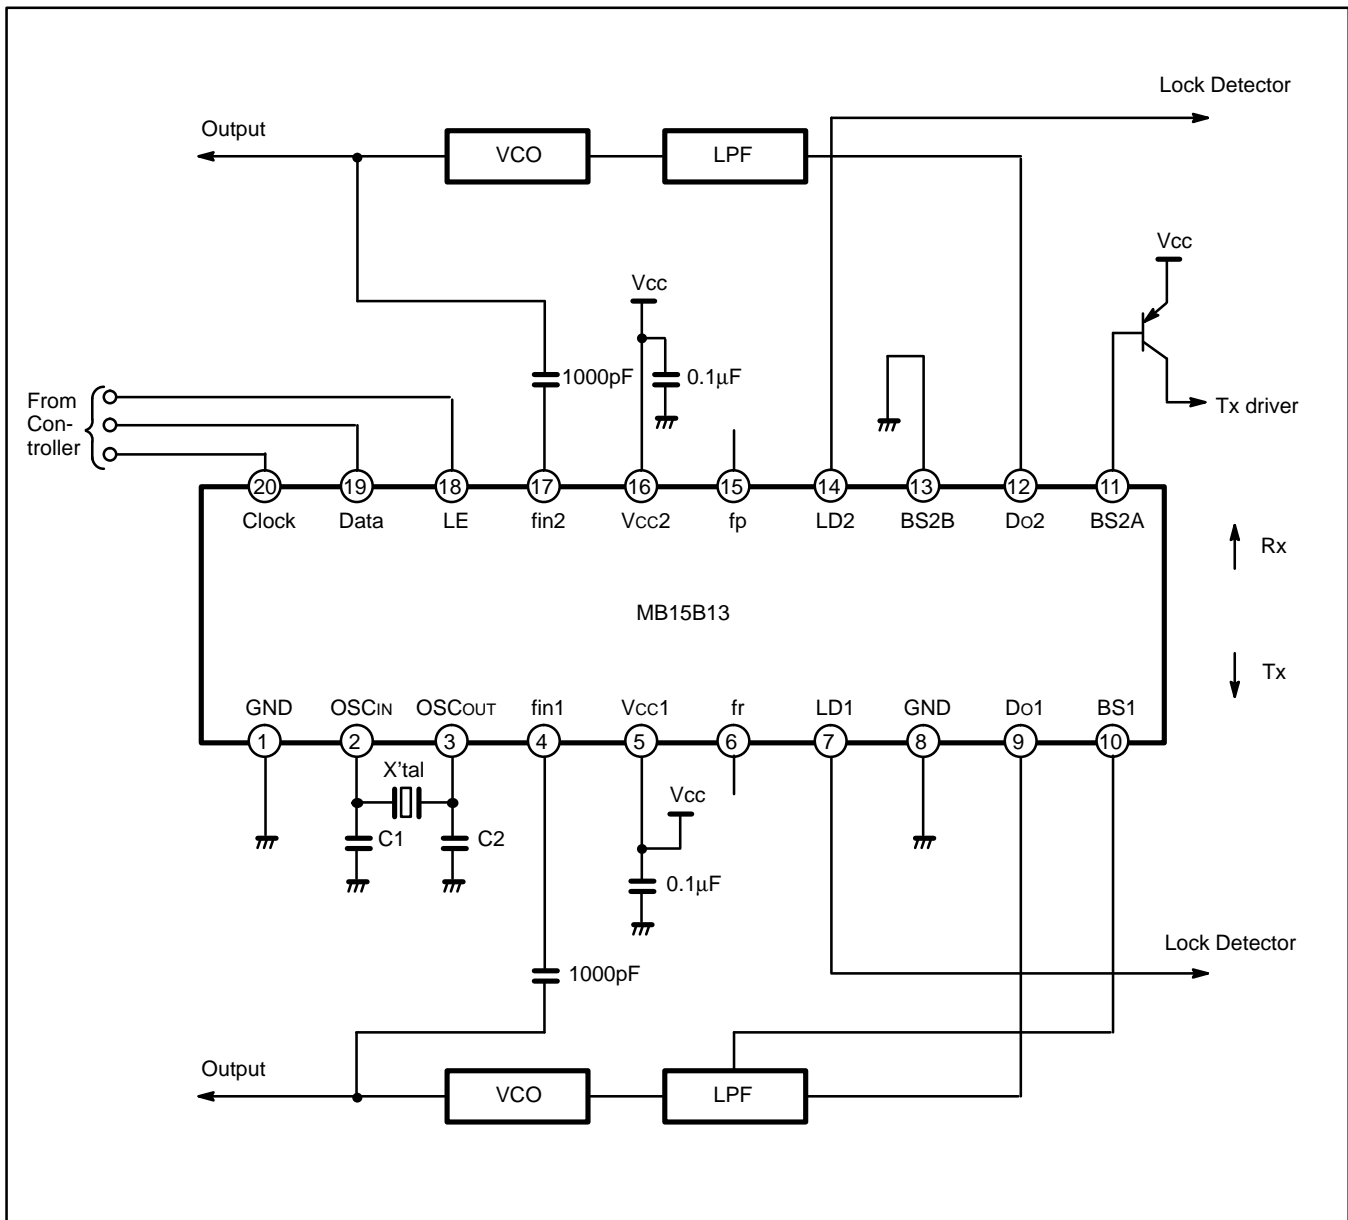

**Note:** C1, C2 : depends on a crystal oscillator.  
 Clock, Data, LE : involves a schmitt circuit.  
 When input pins are open, please insert the pull down/up resistor individually to prevent oscillation.

---

## PACKAGE INFORMATION

